

AC100 Automatic Car-refinish Paint Dispenser

Dispensing Mode	Automatic Dispensing	Max Can Size (D x H)	200 x 180mm (with scale) 200 x 280mm (without scale)
Efficiency (single toner)	200ml/min or 300ml/min		
Minimum Shot	1/2000Y(0.015ml)	Machine Dimension (W X D X H)	1770x1160x1350mm (96 toners)
Pump Capacity	60ml/90ml (Optional)	Heating Module	Optional
Stirring Speed	20-25rpm	Net Weight	650Kg
Canister Size	84x1.35L+12x2.7L	Power	≤350W
No. of Canisters	Up to 96	Power Supply	220V/110V 50Hz/60Hz

SANTINT • CHINA

Add: Feilong Road, Xingyang, Zhengzhou, China

Email: info@santint.com

SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG Katwijk The Netherlands

Email: sales@santint-europe.com

SANTINT • POLAND

Add: ul. Postepu 19. mag.5, 02-676 Warszawa Polska

Email: albert@santintpoland.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road, Suite 220, Glendale Heights,IL 60139, U.S.A

Email: info@santintusa.com

SANTINT • INDIA

Add: Building No.E3 , 2/3 , Hari Hari Compound, Near Gajanan Petrl Pump, Mankoli Nana,Bhiwandi 421302 Thane India

Email: nick@santint.com

SANTINT• BRASIL

Add: Rua Rosa Kasinski, 1109 (Galpão 30) - Capuava - Cep: 09380-128 - Mauá / Sp

Email: contato@santint.com

SANTINT• AUSTRALIA

Add: 3 Technology Circuit Hallam Victoria, Australia

Email: Info.AU@santint.com


WELCOME TO AUTOMATIC
CAR-REFINISH TINTING ERA




High Return · Simple Maintenance · High Efficiency

AC100 Automatic Car-refinish
Paint Dispenser


HOW TO TINT

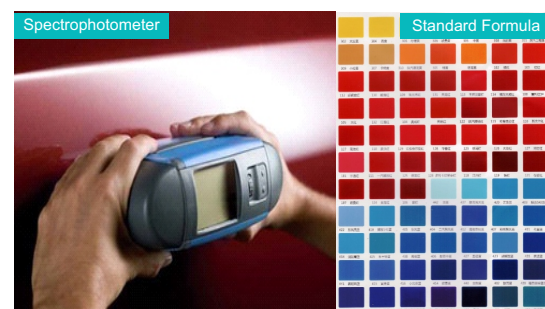

1. Spectrophotometer Reading

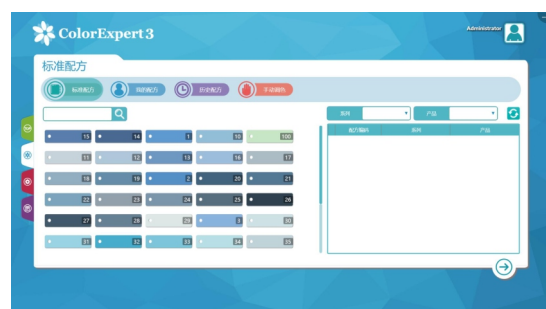

2. Formula creating or selecting

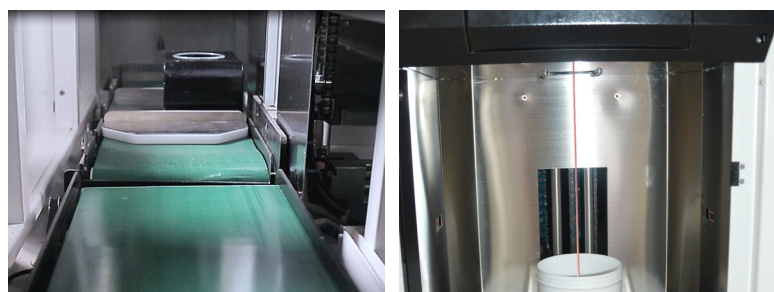

3. Automatic Dispensing



4. Color comparing

ROAMING INTO THE NEW ERA TO

Save labor cost
Increase efficiency
Eliminate mistints

OTHER FEATURES



Heating (optional)
Keep toners in an environment of 8-15 °C



Low maintenance nozzle
Inventive patent 100% recirculation technology
Purge free and residue free



Repeatable Accuracy
Down to 0.015ml with one-time calibration



Clean tinting area
No more paint spillage



Automatic stirring
To prevent sedimentation of the toners



Toners last long
Single direction valve + sealing ring effectively prevent toners from volatilizing

